



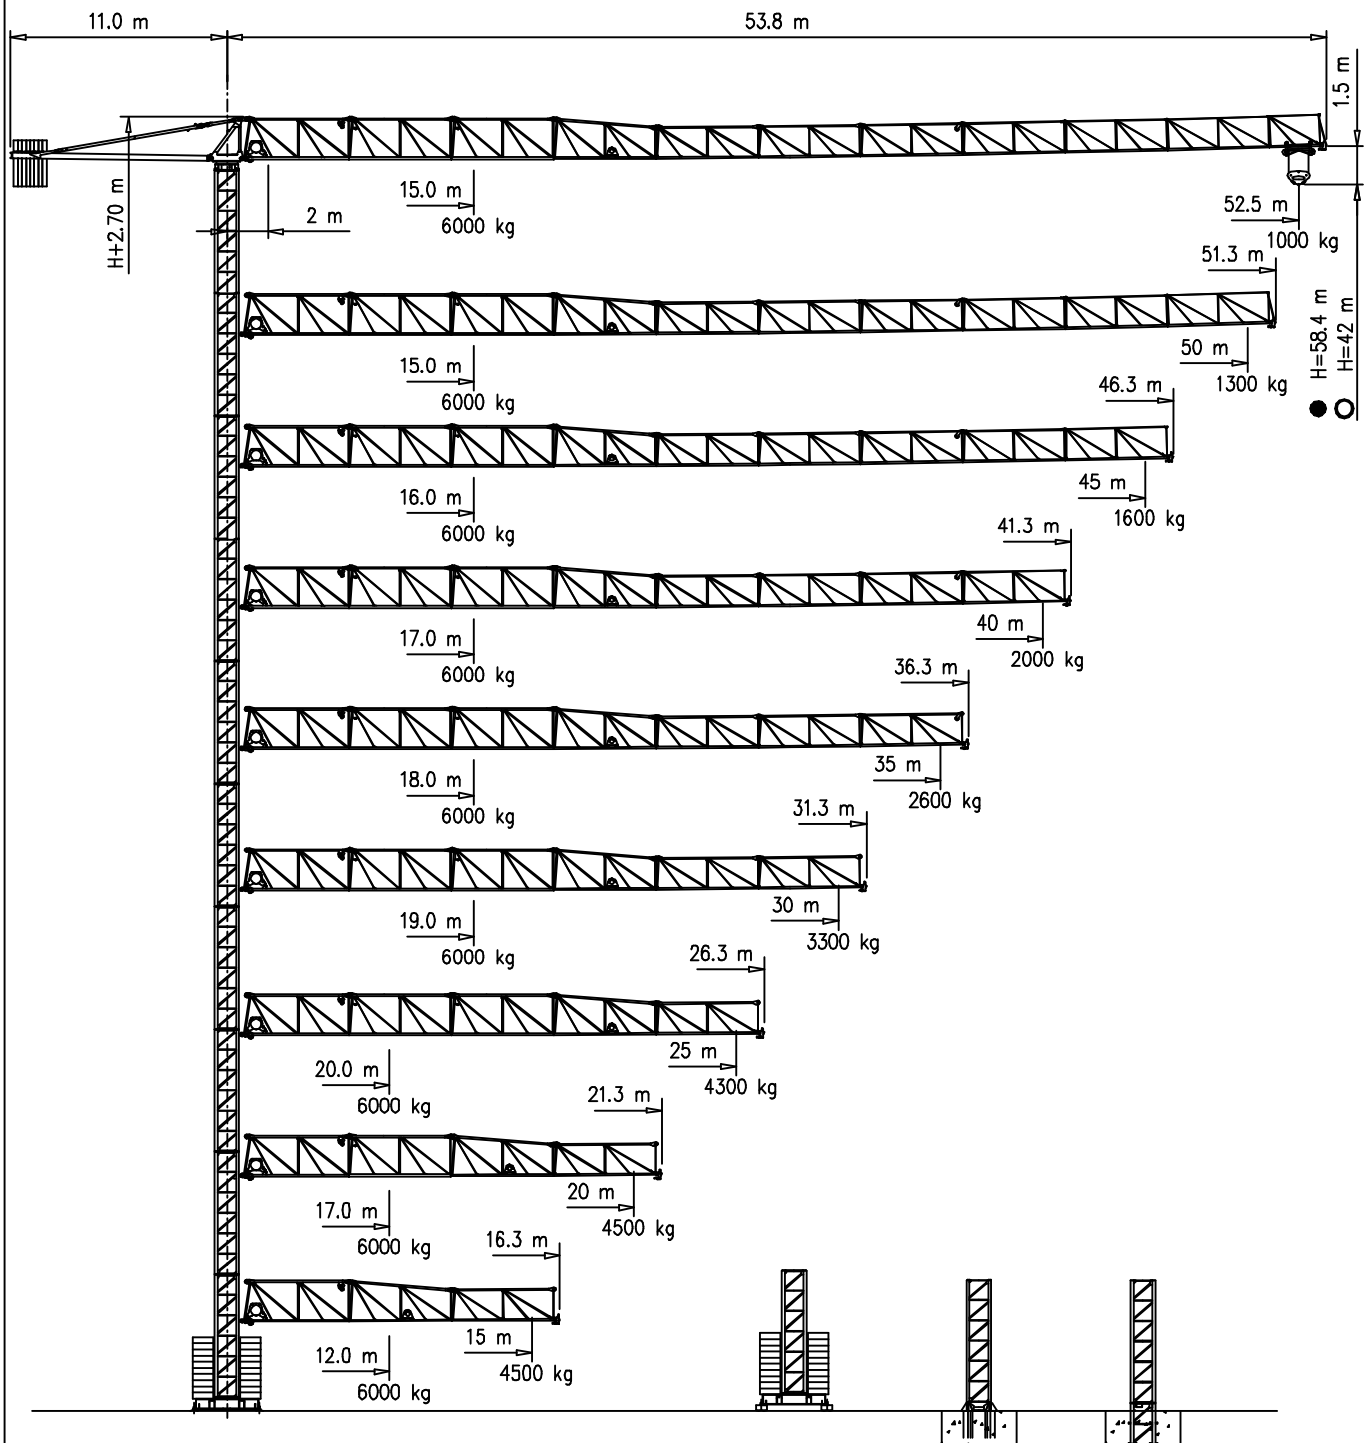


- S1210 – 1.21x1.21 m
- S1700 – 1.70x1.70 m

S1210

15 m → 52.5 m

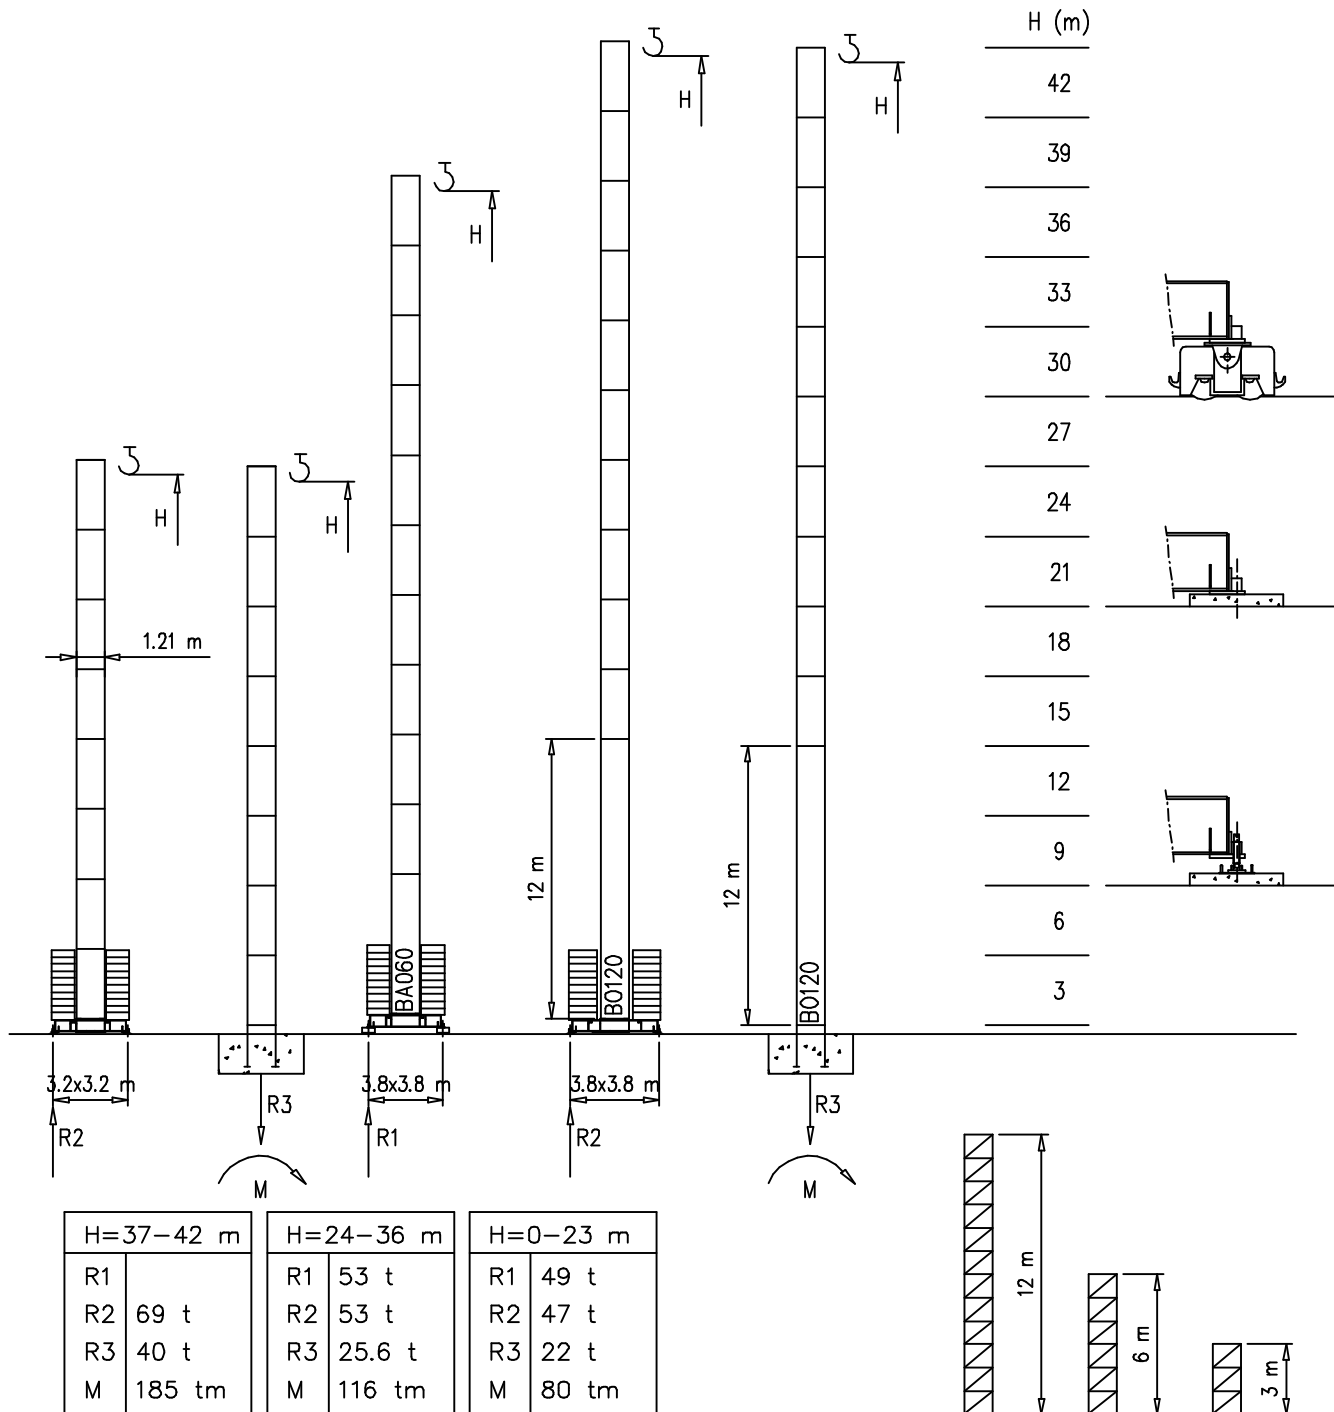


Peso zavorra – Ballast weight – Poids du lest – Ballastgewicht – Peso de lastre




H	n°	Tot.
0-18 m	12 A-B	36000 kg
19-33 m	18 A-B	54000 kg
37-42 m	24 B	72000 kg

	A	B
L	3.6m	4.0m
k	0.3m	1.2m
d	1.15m	0.19m




S1700



15 m → 52.5 m

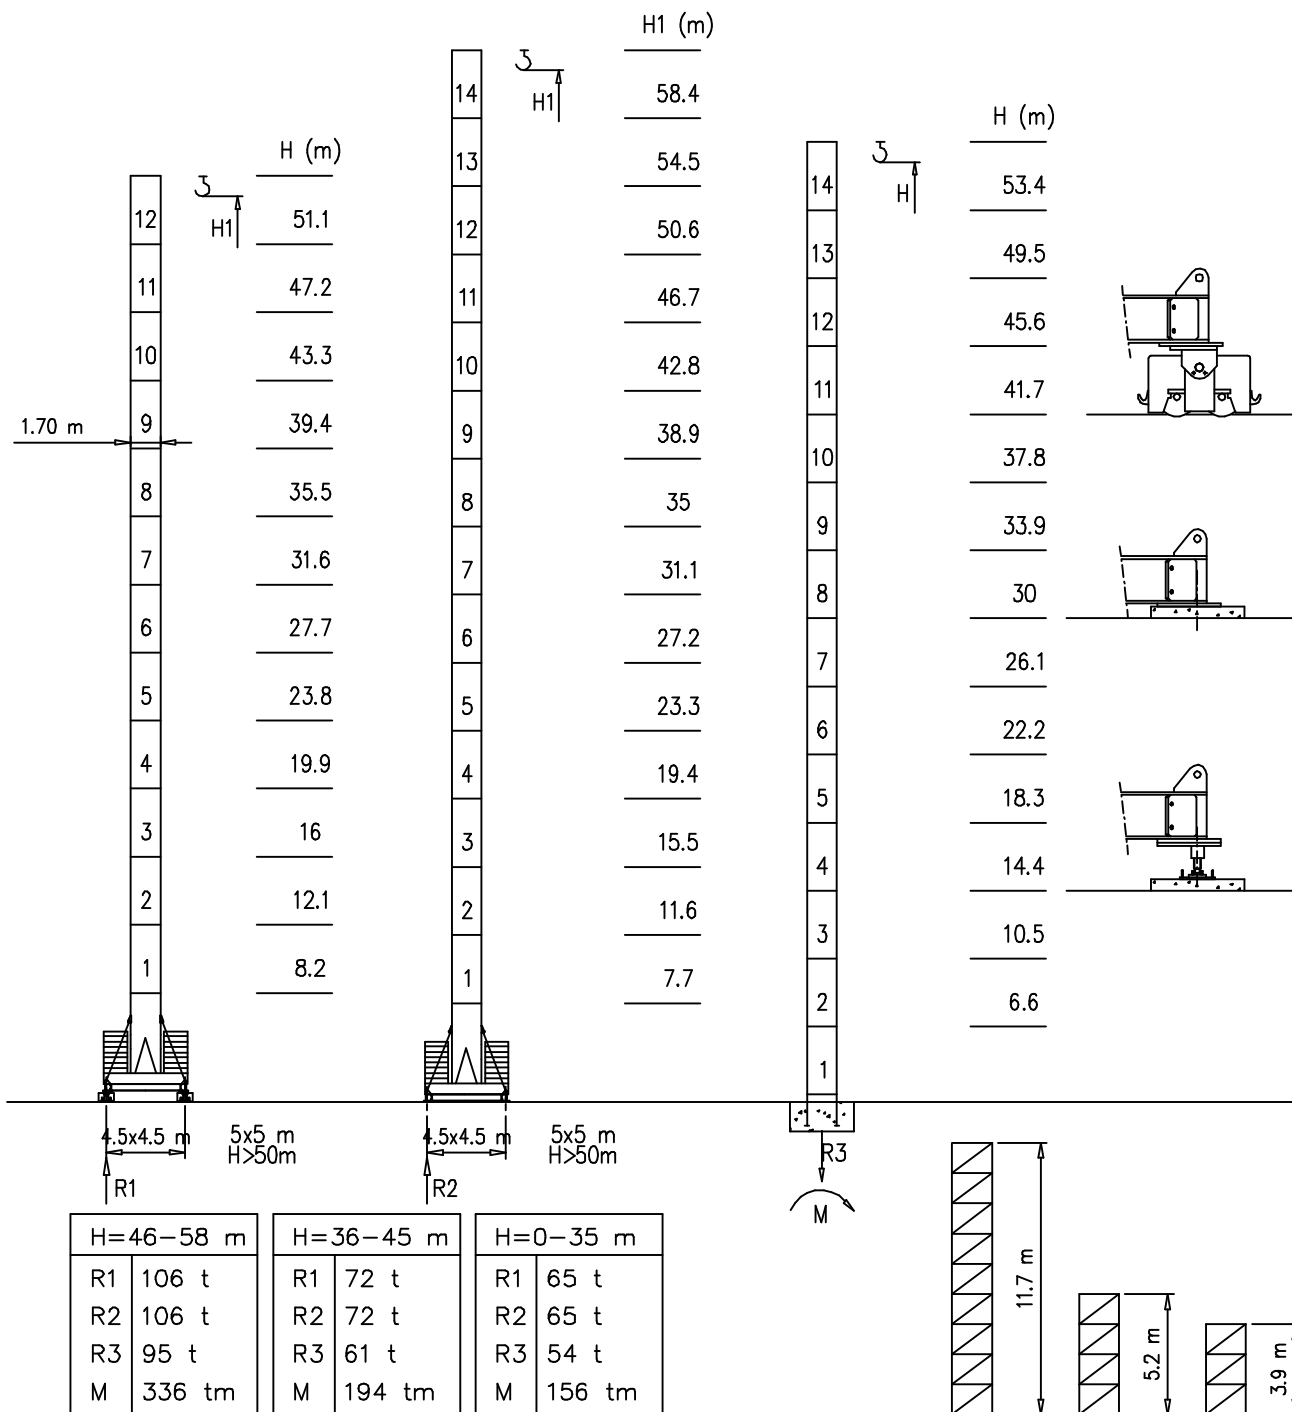

Peso zavorra – Ballast weight – Poids du lest – Ballastgewicht – Peso de lastre



H	n°	Tot.
0-35 m	2C+ 18D	60800 kg
36-45 m	2C+ 22D	72000 kg
46-58 m	2C+ 32D	105000 kg



Curve di carico – Courbes de charges – Load diagrams – LastKurven – Curvas de cargas

Pmax 3000 kg

	14400 kg		52.5 m	2	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50	52.5	m
				3000	3000	2700	2450	2230	2040	1875	1730	1600	1485	1300	1000	kg
	14400 kg		50 m	2	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50		m
				3000	3000	2700	2450	2230	2040	1875	1730	1600	1485	1300		kg
	12000 kg		45 m	2	29	32.5	35	37.5	40	42.5	45					m
				3000	3000	2600	2370	2170	2000	1820	1600					kg
	10800 kg		40 m	2	30	32.5	35	37.5	40							m
				3000	3000	2790	2540	2250	2000							kg
	10800 kg		35 m	2		32.5	35									m
				3000		3000	2600									kg
	9600 kg		30 m	2		30										m
				3000		3000										kg
	8400 kg		25 m	2		25										m
				3000		3000										kg
	7200 kg		20 m	2		20										m
				3000		3000										kg
	4800 kg		15 m	2		15										m
				3000		3000										kg



Pmax 6000/3000 kg




	14400 kg		52.5 m	2	15	17.5	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50	52.5	m
				6000	6000	5075	4350	3810	3360	3000	2700	2450	2230	2040	1875	1730	1600	1485	1300	1000	kg
	14400 kg		50 m	2	15	17.5	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50		m
				6000	6000	5075	4350	3810	3360	3000	2700	2450	2230	2040	1875	1730	1600	1485	1300		kg
	12000 kg		45 m	2	16	17.5	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45				m
				6000	6000	5350	4600	4050	3550	3190	2870	2600	2370	2170	2000	1820	1600				kg
	10800 kg		40 m	2		17	20	22.5	25	27.5	30	32.5	35	37.5	40						m
				6000		6000	4900	4300	3800	3410	3070	2790	2540	2250	2000						kg
	10800 kg		35 m	2		18	20	22.5	25	27.5	30	32.5	35								m
				6000		6000	5380	4720	4180	3750	3380	3000	2600								kg
	9600 kg		30 m	2		19	20	22.5	25	27.5	30										m
				6000		6000	5690	4990	4430	3800	3300										kg
	8400 kg		25 m	2			20	22.5	25												m
				6000			6000	5280	4300												kg
	7200 kg		20 m	2			17	20													m
				6000			6000	4500													kg
	4800 kg		15 m	2		12	15														m
				6000		6000	4500														kg



X (m)	kg
3,2x3,2	2300kg
3,8x3,8	4500kg
4,5x4,5	3800kg

S1210	
(m)	(kg)
3	610
6	1500
12	2500

S1700	
(m)	(kg)
3,9	1600
5,2	2100
11,7	4200

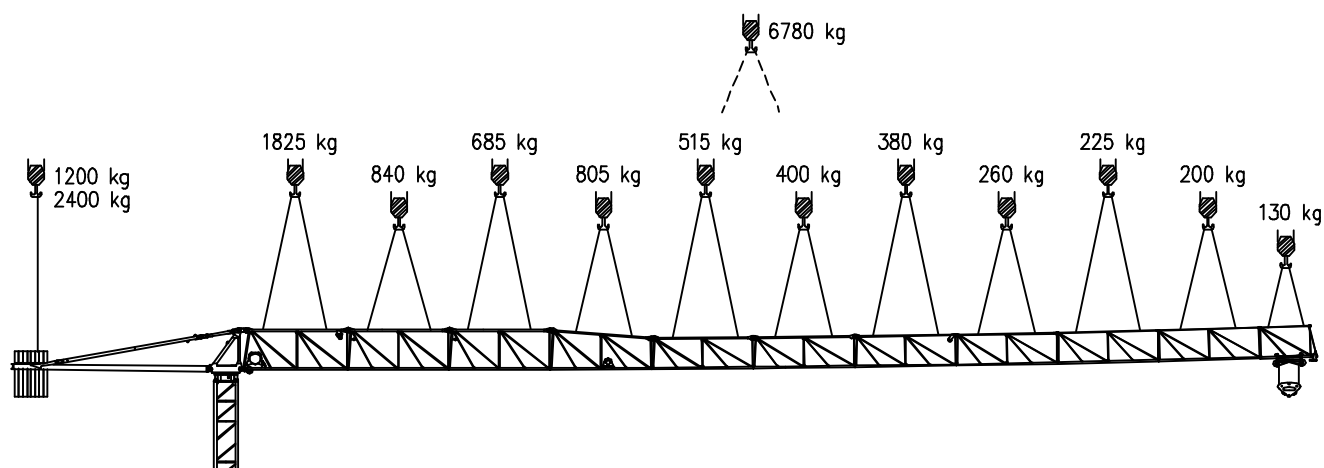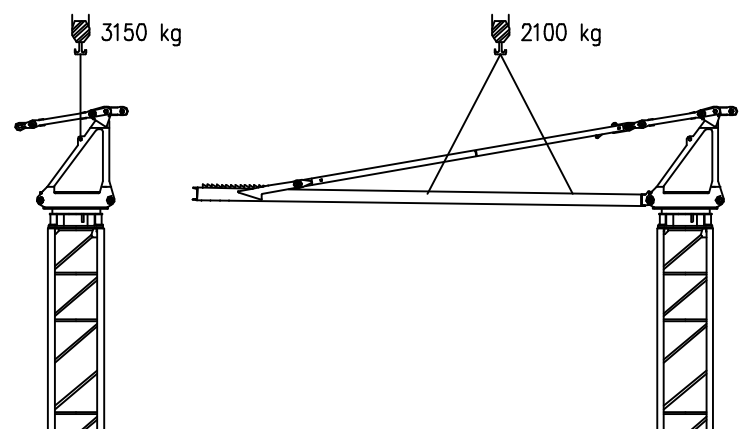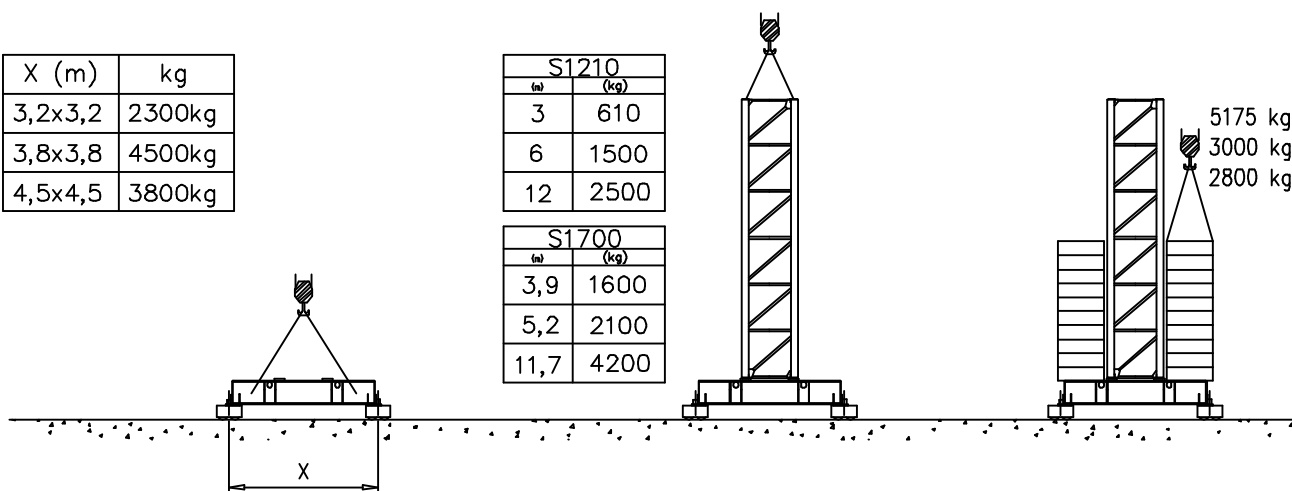

Meccanismi – Mechanisms – Mécanismes – Antriebe – Mecanismos

Sollevamento S20.40 e V20.40 Hoisting Levage Heben Elevaciòn Elevaçao			1a	4 m/min	3000 kg	14.7 kW	S20.40 32 kVA	
			2a	20 m/min	3000 kg			V20.40 28 kVA
			3a	40 m/min	1500 kg			
			1a	2 m/min	6000 kg			
2a			10 m/min	6000 kg				
3a			20 m/min	3000 kg				
Sollevamento S2560 e V25.60 Hoisting Levage Heben Elevaciòn Elevaçao			1a	7 m/min	3000 kg	18.5 kW	S25.60 38kVA	
			2a	28 m/min	3000 kg			V25.60 33 kVA
			3a	56 m/min	1500 kg			
			1a	3.5 m/min	6000 kg			
			2a	14 m/min	6000 kg			
			3a	28 m/min	3000 kg			
Sollevamento V45.60 Hoisting Levage Heben Elevaciòn Elevaçao		1a	2 m/min	6000 kg	33 kW	V45.60 50 kVA		
		2a	20 m/min	6000 kg				
		3a	31 m/min	5000 kg				
		4a	46 m/min	3200 kg				
		5a	60 m/min	2500 kg				
Carrello Trolleying Distribution Katzfahren Distribuciòn Distribuição			1a	OP 5 m/min	6000 kg	3 kW	Potenza elettrica necessaria Puissance électrique nécessaire Necessary electric power Anschlusswert – Potencia	
			2a	25 m/min	6000 kg			
			3a	50 m/min	3000 kg			
Rotazione Slewing Orientation Schwenken Orientaciòn Rotação			1a	0 → 0.2	giri/min tr/min rp/min	4.4 kW @ 1200rpm n° 2 x 2.2 kW		
			2a	0 → 0.6				
			3a	0 → 0.9				
Traslazione Travelling Translation Kranfahren Traslaciòn Translação			1a	OP 0 → 5		3.7 kW		
			2a	0 → 20				

Rete elettrica – Réseau – Mains supply – Netzstrom – Red – Rede electrica 400V – 50 Hz

AFM Gru s.r.l.
via Emilia 11–29010 Pontenure PC ITALY
tel. 0523/510446 ric.aut. fax 0523/510365
www.fmg.ru.com e-mail: info@fmg.ru.com

FEM 1.001
2000/14/CE



Documento commerciale non contrattuale
Per tutte le informazioni tecniche riferirsi
alle corrispondenti istruzioni

Unverbindliches Vertriebsdokument.
Für technische Informationen, siehe die
entsprechenden Anweisungen.

This commercial document is not legally
binding. For any technical information, please
refer to the corresponding instructions.

Documento comercial no contractual
Para cualquier información técnica,
ver la noticia correspondiente.

Code: 15ICA37730A0			
Ed.	Data	Rev	Data
1	15.04.04	1	12.04.05